


## HIGH PERFORMANCE SOLUTIONS


# M2

- 75 m<sup>2</sup>/h printing speed
- 190 cm maximum printing width
- Outstanding price/performance ratio for its Epson i3200 heads
- n.2 printheads
- Very precise printing, perfectly clear output
- Robust Structure

Printing Speed

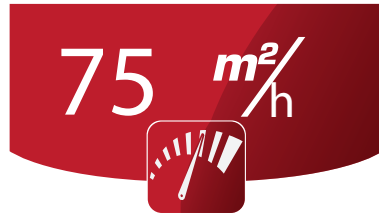

Printing Width

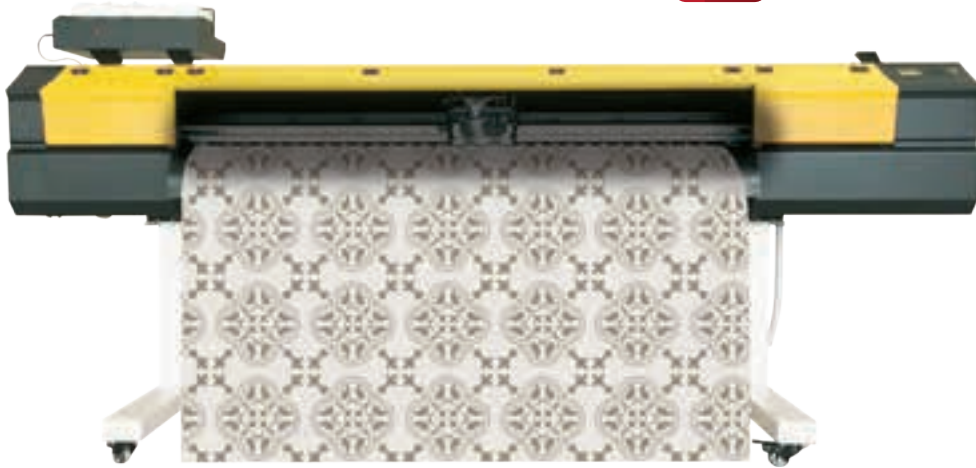

TRU  JET

TRU  PAPER

İSTANBUL


Mehmet Nesih Özmen Mh. Savur Sk.  
No: 22 Merter - Güngören / İstanbul - Turkey  
P +90 212 637 03 34 | F +90 212 637 03 38

BURSA

Anadolu Mh. Karlıdağ Sk. No: 37  
Yıldırım - Bursa - Turkey  
P +90 224 364 61 40 | F +90 224 364 61 46

[www.karyadijital.com](http://www.karyadijital.com)  
[satis@karyadijital.com](mailto:satis@karyadijital.com)

 /karyadijital




- Mimimum drop size 2 pl
- n.2 staggered epson i3200 printhead
- n. 3200 nozzles per head, n. 6400 nozzles in total.



- Independent cleaning station for each head
- Flash station which prevents the nozzle clogging in non-used inks & allow the caps to be always clean.



- From suction system to dampers, filtration system to electronics, many innovative approach & relative patents.



- Independent pump for each print head group.
- Independent cleaning pump for wiper & flashing stage.



- Continuous pinch roller design to prevent uneven paper.
- Patented paper suction system with diagonal channels.



- Special design patented 2 stage ink feeding system.

## TECHNICAL PROPERTIES

Print Head	n.2 on-demand Piezo / staggered
Maximum Print Width	1,900 mm
Ink Type	Sublimation dispers
Number of Colors	4 colors, 6 colors, 8 colors (Optional)
Ink Feeding System	Open bulk system with 20 µm filter.
Media	Width: 210 mm ~ 1,910 mm Thickness: 1 mm or less Weight: up to 20 kg Lenght: 200 - 300 m Roll Diameter: 50 mm - 75 mm
Printing Speeds	360 x 1200 - 2 pass 75 m <sup>2</sup> /h 360 x 1800 - 3 pass 56 m <sup>2</sup> /h 720 x 1200 - 4 pass 38 m <sup>2</sup> /h
RIP Software	ErgoRIP (texprint) / Neostampa / Maintop
Interface	USB
Power Features	AC 100 ~ 120 V ± 10 / AC 220 ~ 240 V ± 10, 50/60 Hz ± 1Hz
Power Consumption	300 w or less (except drying unit)
Net Sizes (G x D x Y)	3,130 mm (G) x 850 mm (D) x 1,440 mm (Y)
Gross Sizes (G x D x Y)	3,410 mm (G) x 830 mm (D) x 1,120 mm (Y)
Net / Gross Weight	335 kg / 480 kg